

DOOR CLOSER GUIDANCE

Fixing Positions

Figure 1: Standard Fixing


A standard fit where the closer is fitted to the pull side of the door.

Figure 61: Transom Fixing

A transom mounting where the closer is fitted to the door frame.

Figure 66: Parallel arm Fixing

Where the closer is fitted to the push side with a parallel arm bracket.

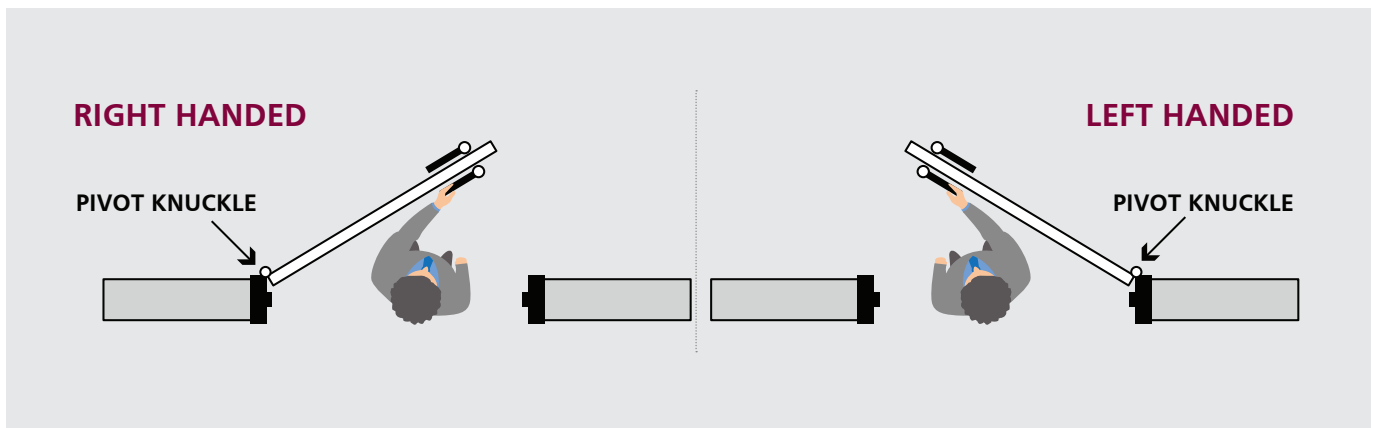

Handing

There are various opinions amongst hardware manufacturers and door manufacturers on the handing of a door and hardware. To make it easy, Rutland have chosen the method whereby if you are on the side of the door where you can see the hinge knuckle, if the hinge knuckle is on your left, the door is left handed, and if the hinge knuckle is on your right it is a right handed door.

DOOR CLOSER GUIDANCE

Typical Standard Arm Installation Details

Figure 1 - Standard

For fixing pull side of the door.

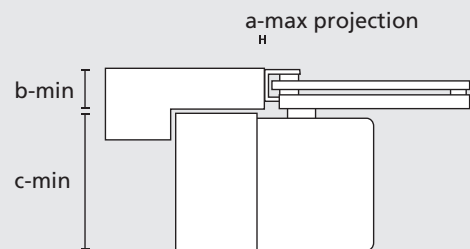
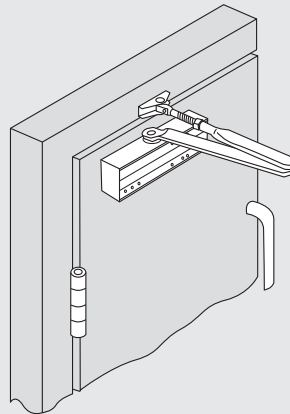


Figure 66

For fixing push side of the door.




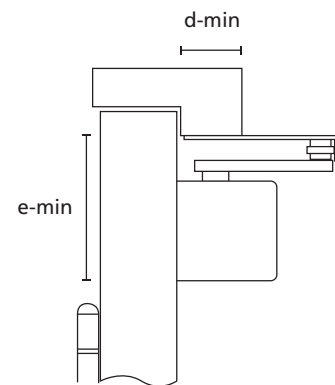


Figure 61

For fixing to transom on push side of the door.

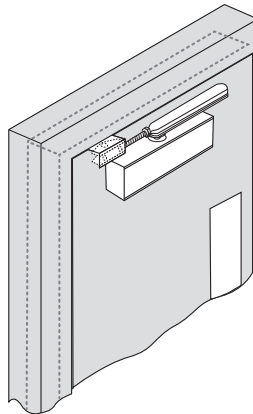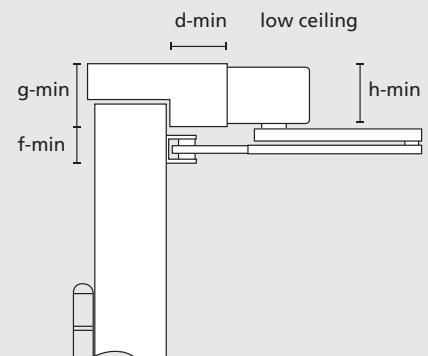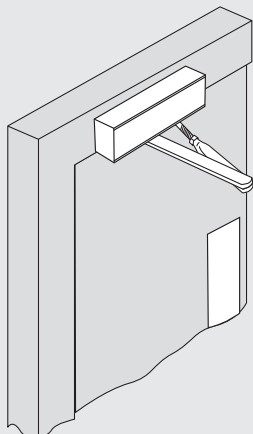

Fixings and fixing instructions are supplied in each pack.