


CONCEALED SLIDE ARM DOOR CLOSERS

ITS.11204

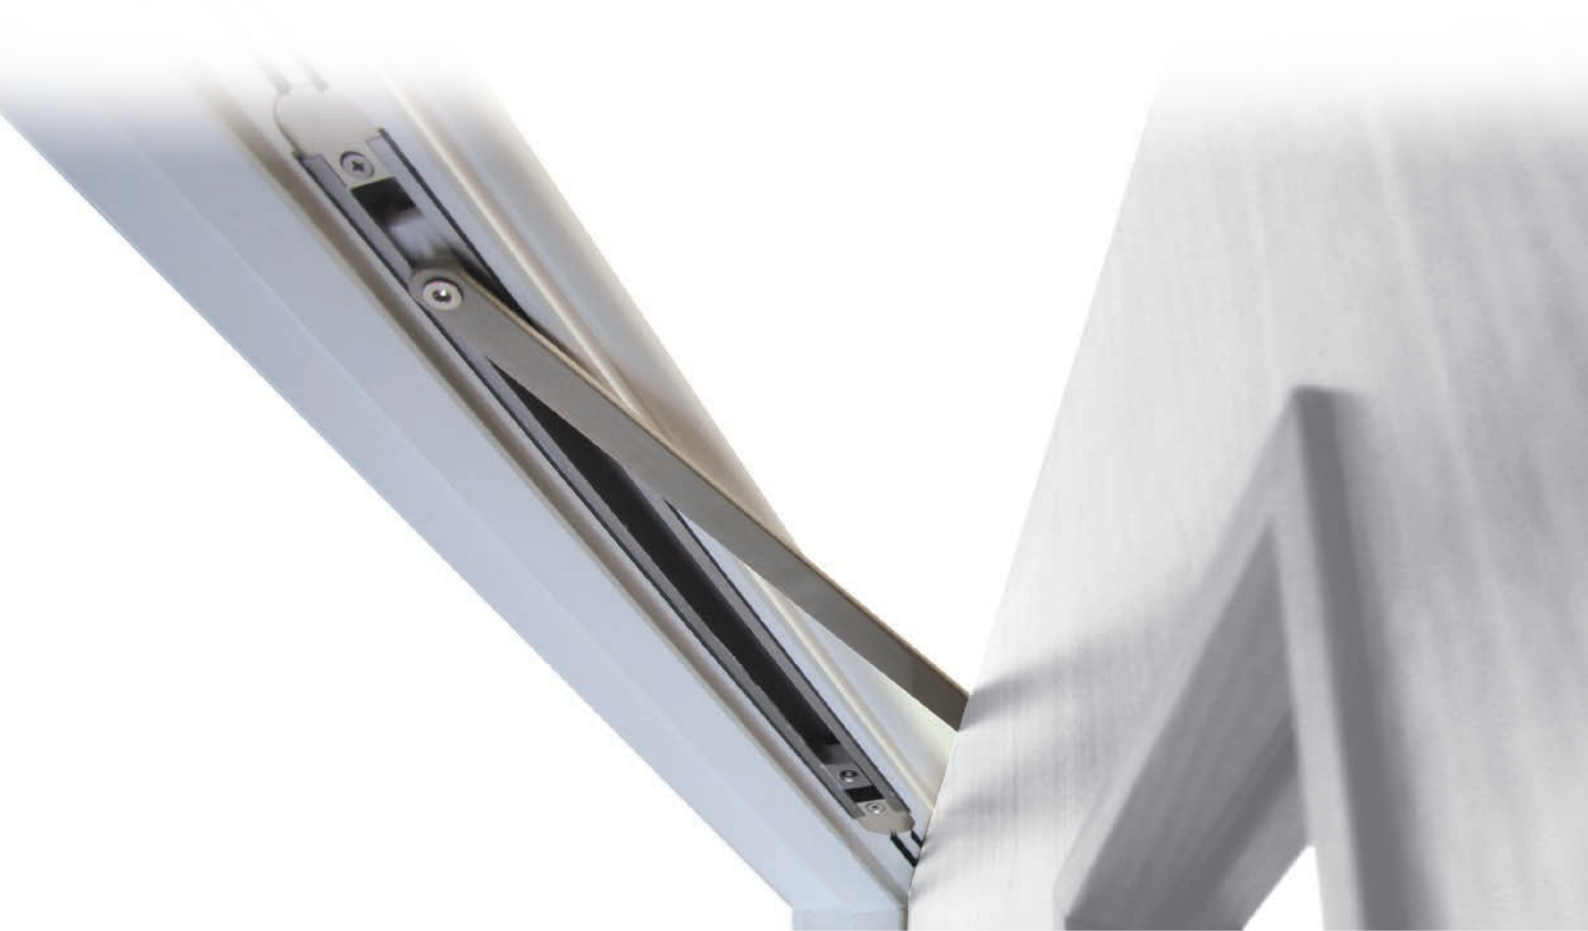

CONCEALED SLIDE ARM DOOR CLOSERS

ITS.11204

Renowned for its slimline mechanism (32mm body) and suitability for assisting BS8300 requirements, the Rutland ITS.11204 Cam Action door closer has been successfully fire tested numerous times in 44mm fire doors, making it a perfect door closer for situations where minimal aesthetics are required.

- Certifire Approved
- Power Adjustable by spring, size 2-4
- Suitable for both 44 and 54mm thick doors
- Available in Silver, Satin Nickel, Polished Nickel, Polished Brass & Antique Brass for next day delivery



FD30 to FD120
Timber Doors




Opening Angle
110°



Two-Stage
Speed Regulation



Guarantee



Max Door
Width



Max Door
Weight



Product Features	ITS.11204
Delayed Action	-
Back Check	-
Opening Angle	110°
Fig.1 Pull Side Door Width	595-1100mm
Fig.66 Push Side Door Width	595-1100mm
Fig.1 BS8300 Min Door Width	835mm
Max Door Weight	<130kg
Power Adjustment	By Spring
Hold Open (not for fire doors)	o
Dimensions	W243 x H52 x D32mm

Certification Compliance	
Certifire	✓
UKCA	✓
CE	✓
BS EN 1154	✓
BS EN 1634	✓
UL10C	-
UL228	✓
ANSI BHMA	-
EPD 3.09E+01 kg CO ₂ eq	✓

Key: ✓ Yes - No o Option

Finishes

See page 96 for more detail

