

ITS.11204

Renowned for its slimline mechanism (32mm body) and suitability for assisting BS8300 requirements, the Rutland ITS.11204 Cam Action door closer has been successfully fire and endurance tested numerous times in 44mm fire doors, making it a perfect door closer for situations where minimal aesthetics are required.

Key Features:


- Certifire Approved
- Power Adjustable by spring, size 2-4
- Suitable for both 44 and 54mm thick doors
- Available in Silver, Satin Nickel, Polished Nickel, Polished Brass, Antique Brass Satin Brass & Dark Bronze for next day delivery



30-60min

Opening Angle
110°Two-Stage
Speed Regulation

Guarantee

Max Door
Width
1100mmMax Door
Weight
130KgIntumescent kit
(IP.114)

Finishes

See page 148 for more detail

SE
SilverSNP
Satin NickelPNP
Polished NickelPVD
Polished BrassAB
Antique BrassSB
Satin BrassDB
Dark BronzeBK
Black

Approved Product CF 5902



1720



1812



Product Features

ITS.11204


Delayed Action	-
Back Check (cushion stop is available)	-
Opening Angle	110°
Door Width Min-Max	595-1100mm
Max Door Weight	<130kg
BS8300 Min Door Width	826mm
Power Adjustment	By Spring
Hold Open (not for fire doors)	o
Dimensions	W243 x H52 x D32mm

Certification Compliance

Certifire	✓
UKCA	✓
CE - For classification see website	✓
BS EN 1154	✓
BS EN 1634-1	✓
BS EN 1634-3	✓
UL10C	-
UL228 (US) [Not permitted in Canada]	✓
ANSI BHMA	-
EPD 3.09E+01 kg CO ₂ eq	✓

Key: ✓ Yes - No o Option

We recommend concealer closers are machined on a CNC machine.

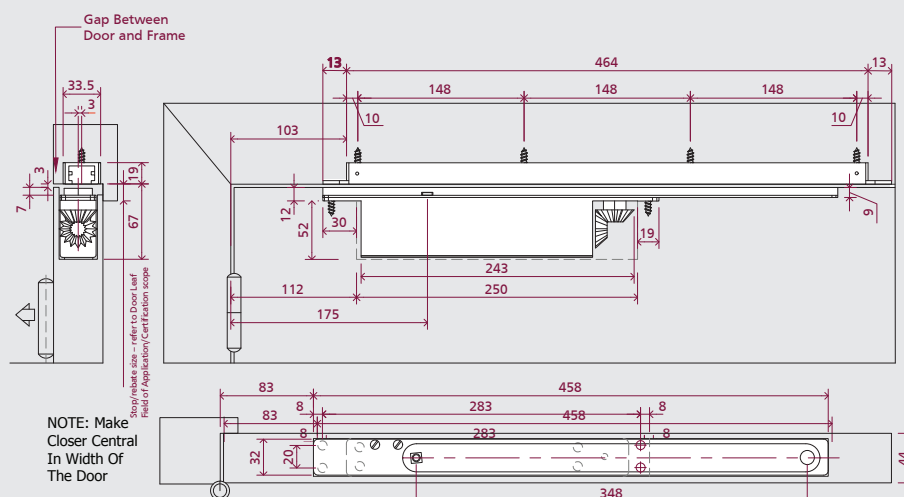

All dimensions shown are in mm • For fitting instructions see website