

ITS.11205

Renowned for its high efficiency, the Rutland ITS.11205 cam action door closer has size 2-5 power adjustment and is suitable for use in doors 54mm+ thick. With its cam and roller mechanism, and ease of opening, this closer is suitable for assisting Document M and BS8300 requirements.

Key Features:

- Fully concealed when the door is closed
- Power Adjustable by spring, size 2-5
- Available in Silver, Satin Nickel, Polished Nickel, Polished Brass Antique Brass & Black for next day delivery



30-60min

Opening Angle
120°Two-Stage
Speed Regulation

Guarantee

Max Door
WidthMax Door
WeightIntumescent kit
(IP.115)

Finishes

See page 148 for more detail

SE
SilverSNP
Satin NickelPNP
Polished NickelPVD
Polished BrassAB
Antique BrassBK
Black

Product Features

ITS.11205


Delayed Action	-
Back Check	-
Opening Angle	120°
Door Width Min-Max	595-1250mm
Fig.1 BS8300 Min Door Width	835mm
Max Door Weight	<180kg
Power Adjustment	By Spring
Hold Open (not for fire doors)	o
Dimensions	W243 x H58 x D42mm

Certification Compliance

Certifire	-
UKCA	✓
CE - For classification see website	-
BS EN 1154	✓
BS EN 1634-1	✓
UL10C	-
UL228	✓
ANSI BHMA	-
IFCC	✓
EPD 3.09E+01 kg CO ₂ eq	✓

Key: ✓ Yes - No o Option

We recommend concealer closers are machined on a CNC machine.

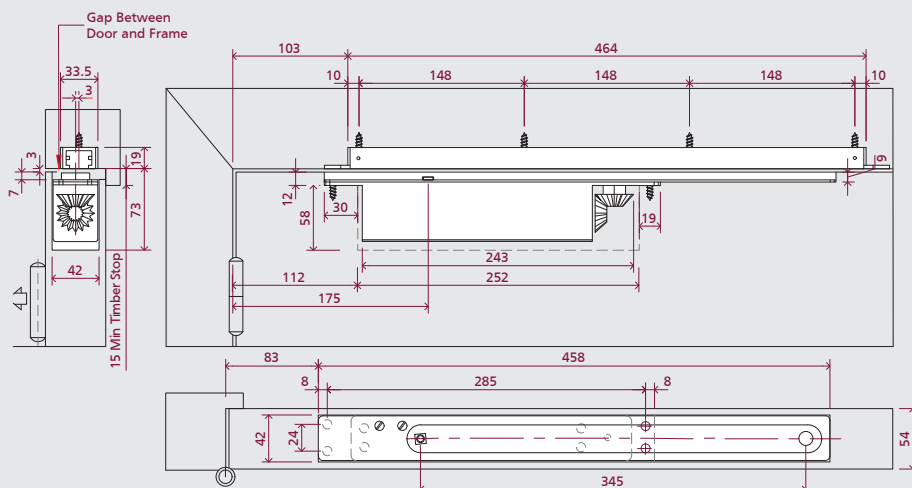

All dimensions shown are in mm • For fitting instructions see website