




SCISSOR ARM DOOR CLOSERS

TS.4204



SCAN FOR FULL INFO

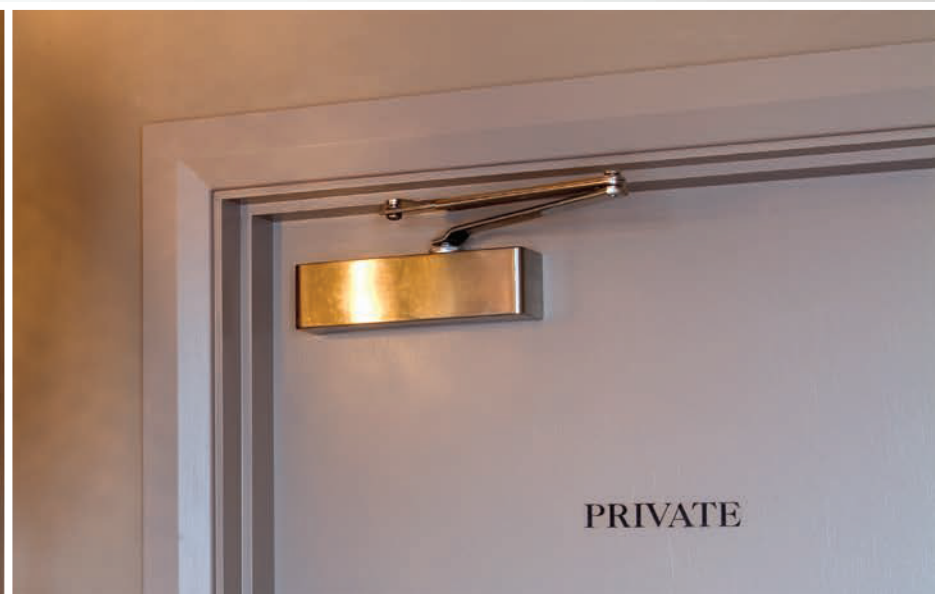

TS.4204

Certifire approved EN2-4 Rack and Pinion contract door closer, adjustable by spring.

Key Features:

- Easy to read instructions, saving over 12 minutes of fitting time
- Delayed action and back check as standard
- Corrosion Grade 3 – Recommended for internal use



FD30 to FD120
Timber Doors



Opening Angle
180°



Two-Stage
Speed Regulation



Guarantee



Max Door
Width



Max Door
Weight



Finishes

See page 148 for more detail



SE
Silver



SNP
Satin Nickel





PNP
Polished Nickel

Product Features

TS.4204

Delayed Action*	✓
Back Check	✓
Opening Angle - Pull-side	180° (Fig 1)
Fig.1 Pull Side Door Width	340-1100mm
Fig.66 Push Side Door Width	485-1100mm
Max Door Weight	<80kg
Power Adjustment	By Spring
Hold Open (not for fire doors)	◦
Dimensions (including cover)	W250 x H65 x D53mm
Certification Compliance	
Certifire	✓
UKCA	✓
CE - For classification see website	✓
BS EN 1154	✓
BS EN 1634-1	✓
UL10C	-
UL228	-
ANSI BHMA	-
EPD 3.09E+01 kg CO ₂ eq	✓
Key: ✓ Yes - No ◦ Option	
*Not covered by Certifire	

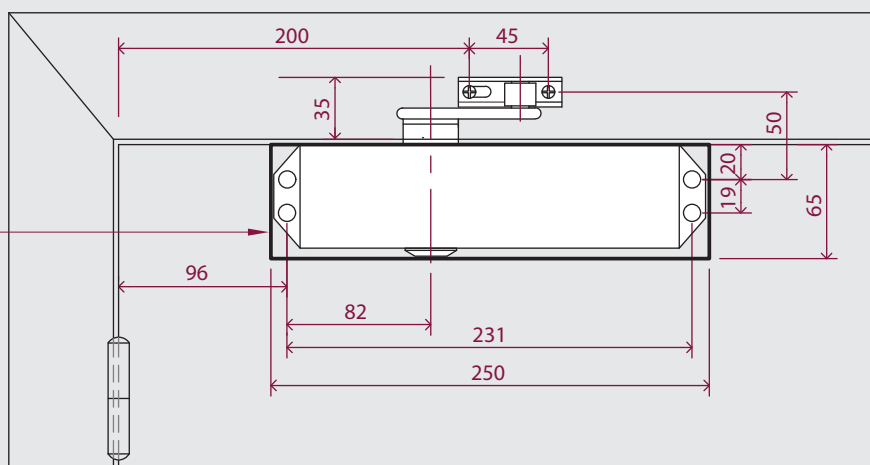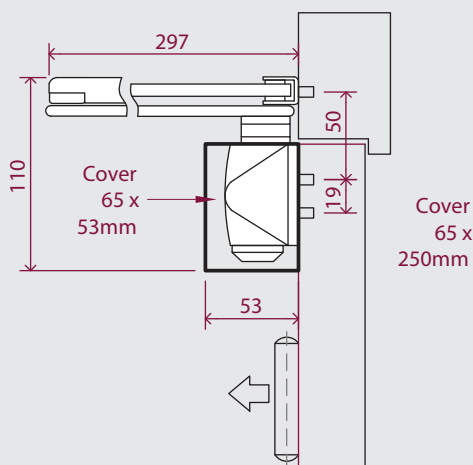

All dimensions shown are in mm • For fitting instructions see website