


Electric Release

The Rutland ANSI Electric Releases come with both long and short stainless-steel faceplates, offering a 1000 lbf holding force and fire ratings suitable for 30 and 60-minute fire doors. These releases are site-selectable for 12/24V DC operation and can be configured to Fail Safe or Fail Secure with a simple screw adjustment. The RAL900 range serves as a direct replacement for Adams Rite, Trimec, and Alpro Strikes, with extension lips available in 10mm, 25mm, and 50mm sizes. These electric releases are compatible with most major brands of mortice night latches.

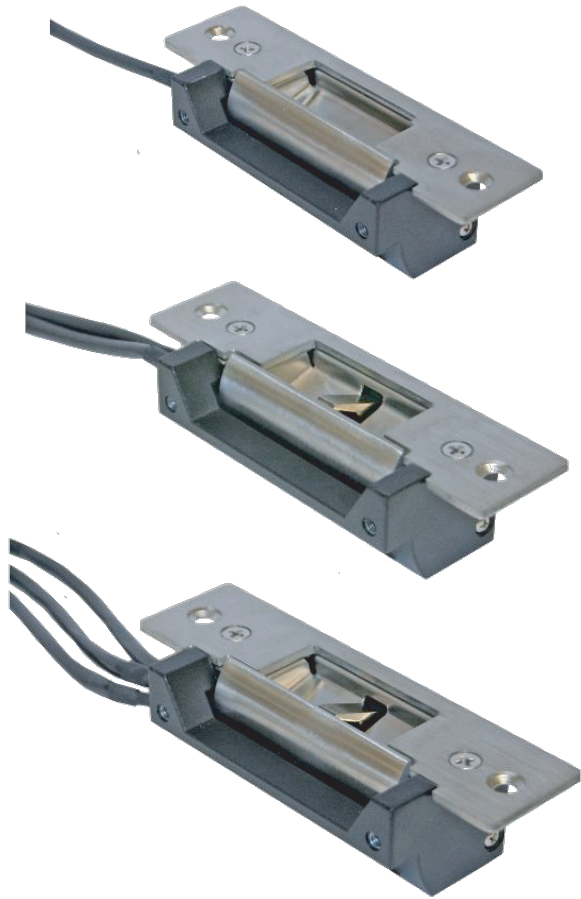

Product Features

Supplied with Long and Short Stainless-Steel Faceplate	✓
Dual voltage 12/24V DC (selectable on site) with current	✓
Fail Safe/Fail Secure Selectable	✓
Fire rated for use on 30 min timber door to BS1634-1	✓
Holding Force 4448N (1000 lbf/434 kgf)	✓
Dimensions H202 x W32 x D33	✓
10, 25 and 50mm extension lips available	✓
Direct replacement for Adams Rite, Trimec, CQR and Alpro	✓

Compliance - Certification & Testing

CE Marked – EMC Compliant	✓
Certified to BS EN 14846:2008	✓

Type	Re-order code	Description	Fire Rated
RAL900	10938	ANSI Mortice Electric Release 12/24V DC (Fail Locked/Unlocked) Long/Short Faceplate	Yes
RAL900M	10939	ANSI Mortice Electric Release 12/24V DC (Fail Locked/Unlocked) Long/Short Faceplate - Monitored	Yes
RAL900DM	10940	Electric Release 12 / 24V DC – Fail-Safe / Fail Secure – Double Monitored	Yes

